

Henny Penny Evolution Elite™ Smart Touch Open Fryer: Drain Pan Assembly

Standards

The Drain Pan Assembly consists of:

- Drain Pan
- Metal Screen
- SmartFilter Pad / SmartFilter Paper
- Retaining Ring
- Crumb Catcher
- Drain Pan Lid

Drain Pan Assembly

- Start with a **clean drain pan assembly** every morning. Make sure all the parts are dry to prevent dampening SmartFilter pad and break down oil.



- Put the **metal screen** on the bottom of the **drain pan**.



For restaurants using Magnesol:

- Put a **SmartFilter paper** , on top of the metal screen

For restaurant not using Magnesol:

- Put the SmartFilter Pad - **smooth side facing down**, on top of the metal screen



- Put the **retaining ring** on top of the SmartFilter pad to prevent crumbs from being sucked through the hole in the bottom of the drain pan and blocking the pump.



Add Magnesol (Skip this step if your restaurant doesn't use Magnesol)

- Using the Magnesol® Measuring Cup measure out 90 g (**PER VAT**) against the mark on the cup.




Magnesol XL Filter aid



Magnesol XL Measuring Cup

- Tap the Magnesol® Measuring Cup until the contents are level, ensure you have the correct dosage in the container (90 g per vat)
- Spread the Magnesol® – Frying Oil Filter Aid evenly over the Filter Envelope

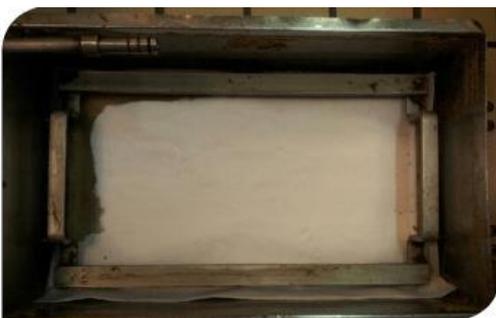

- Put the **crumb catcher** on top of the retaining ring.



Place lid on drain pan

- Slide the **lid** onto the drain pan.



- **Check the drain pan o-rings** daily for nicks and tears to prevent oil leaking.
- To replace o-ring, use o-ring tool (same as for Taylor machine). Push underneath the o-ring. Pull up and off the end of the tube. Roll new o-ring into notch on tube. Refer to Products, Supplies and Tools for more information



- Lubricate the o-rings on the filter tube with cold oil.



- Push the drain pan assembly back underneath fryer, making sure the filter tube on the pan makes a **good connection** with the fitting underneath the fryer.



- Make sure the "drain pan-stop" is on the lock position.



To avoid oil spillage, make sure drain pan is locked into place and cover is in place before opening the drain. The drain pan holds 1 full vat. Overfilling the drain pan may cause slippery floors which may result in personal injury.